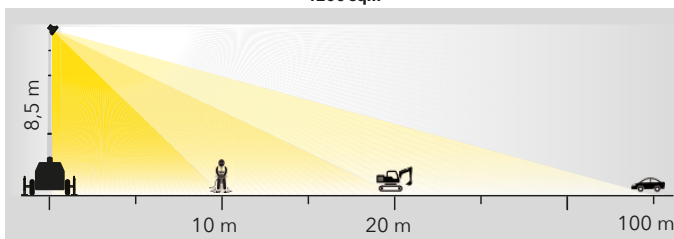


ONIS VISA LT - CUBE - 6x160W LED
LIGHTING TOWER


4200 sqm


MAIN DATA

Floodlights:	6x160	W
Lamps model	230V LED lights	
Illuminated area (5 lux min.)	4200	(sqm)
Rated output	3.5	(kVA)
Frequency	50	Hz
Noise level (at 7m)	65	dB

DIMENSIONS FOR TRANSPORT

Width	1200	mm
Length	1200	mm
Height	2560	mm
Dry Weight	1013	Kg

DIMENSIONS IN OPERATION

Width	2390	mm
Length	2390	mm
Height	8500	mm
Full weight	1200	Kg

ENGINE

Engine brand	KUBOTA	
Engine model	Z482	
Fuel Type	Diesel	
Cylinders	2	
Speed	1500	r.p.m.
Horse Power	10,9	HP

ALTERNATOR

Alternator	Synchronous	
Rated Output	3,5	kVA
Outlet socket	1,2	kVA - 230V
Rated frequency	50	Hz

CONSUMPTION

Fuel tank capacity	220	(l)
Fuel consumption	0,55	(l/h)
Runtime before refuelling	400	(h)

MUST

Lifting Method	Manual	
Maximum Height	8,5	(m)
Maximum Wind Speed	110	(km/h)
Rotation	340	(°)
Safety brake	Mechanical	

OTHER DATA

- Multi-directionally adjustable and tiltable floodlights
- 7 sections hydraulic vertical tower 8,5 m, 340° rotatable
- Standard light sensor for machine power on and off
- Galvanized metalworks
- Very compact dimensions for easy handling & transportability, up to 22 units per truck
- Central lifting eye longitudinal and transversal forklift pockets for effective handling
- Plug & play, colour coded cables and connectors
- Guided main coiled cable to avoid damage during tower operation
- Control panel with engine protection and fuel level indicator
- Circuit breaker for electrical protection against overload
- Certified wind stability up to 110 km/h
- 4 extendable & height adjustable stabilizers
- On board levels for guidance during stabilization

Standard reference conditions temperature 25°C, altitude 100m asl, relative humidity 30%, atmospheric pressure 100 kPa (1 bar), power factor 0.8 lag, balanced load - non distortional. Fuel consumption is nominal and refers to specific weight 0,850kg/l. Sound power values refer to free field conditions: the installation site may influence the values. Dimensions, weights and other specifications contained in the technical data sheet and related attachments are nominal, subject to tolerances and refer to the model with standard equipment; any optional and additional equipment/accessories can modify weight, dimensions, performance

The data contained in this document is nominal and refers to the standard equipped model and is not binding. Visa S.p.A. reserves the right to revise the information without notice per our policy of continuous product development and improvement.

